




DTT-D90

特性 Characteristics	单位 Unit	测试条件 Test conditions	DTT-D90	
初始磁导率 μ_i Initial permeability	-	10kHz 0.1mT 25°C	1800 ± 25%	
振幅磁导率 μ_a^* Amplitude permeability	-	25kHz 400mT	25°C	2900
			100°C	2450
饱和磁通密度 B_s^* Saturation flux density	mT	H=1194A/m	25°C	540
			100°C	460
功耗 P_{cv}^* Power loss	kw/m ³	25kHz 200mT	25°C	138
			100°C	55
		100kHz 200mT	25°C	750
			100°C	325
居里温度 T_c Curie temperature	°C		≥ 280	
电阻率 ρ^* Resistivity	$\Omega \cdot m$		6	
密度 D^* Density	g/cm ³		4.85	

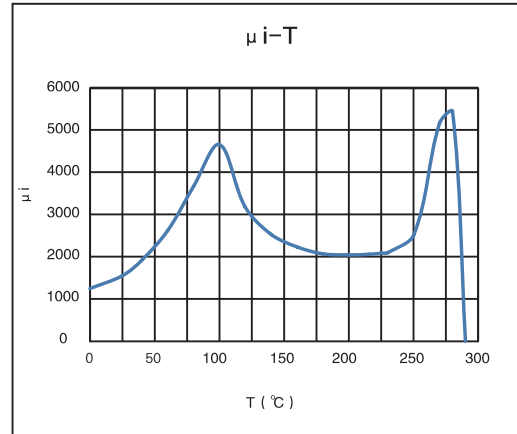

*: 典型值 Average value

