








DTT-D90

| 特性 Characteristics | 单位 Unit | 测试条件 Test conditions | DTT-D90 | |
|--|-------------------|----------------------|------------|------|
| 初始磁导率 μ_i Initial permeability | - | 10kHz 0.1mT 25°C | 1800 ± 25% | |
| 振幅磁导率 μ_a^* Amplitude permeability | - | 25kHz 400mT | 25°C | 2900 |
| | | | 100°C | 2450 |
| 饱和磁通密度 B_s^* Saturation flux density | mT | H=1194A/m | 25°C | 540 |
| | | | 100°C | 460 |
| 功耗 P_{cv}^* Power loss | kw/m ³ | 25kHz 200mT | 25°C | 138 |
| | | | 100°C | 55 |
| | | 100kHz 200mT | 25°C | 750 |
| | | | 100°C | 325 |
| 居里温度 T_c Curie temperature | °C | | ≥ 280 | |
| 电阻率 ρ^* Resistivity | $\Omega \cdot m$ | | 6 | |
| 密度 D^* Density | g/cm ³ | | 4.85 | |

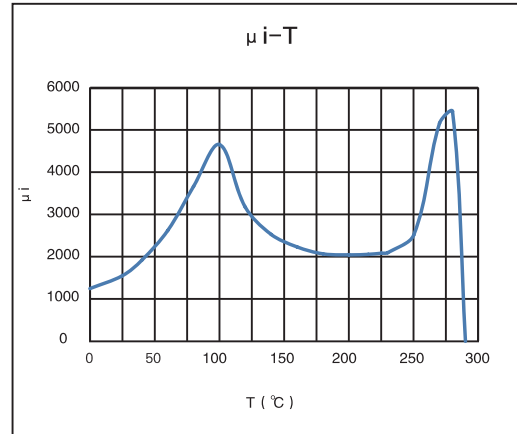


*: 典型值 Average value

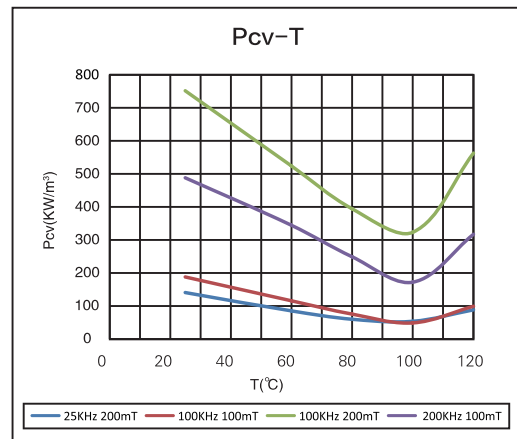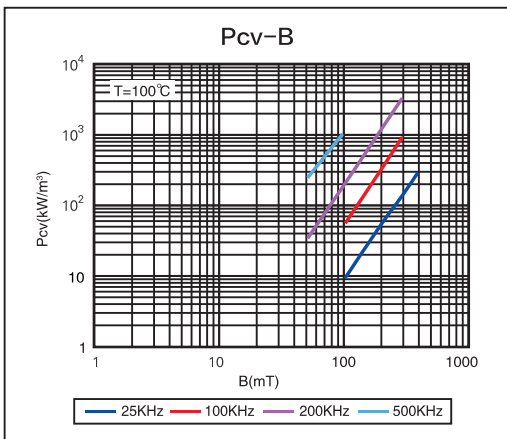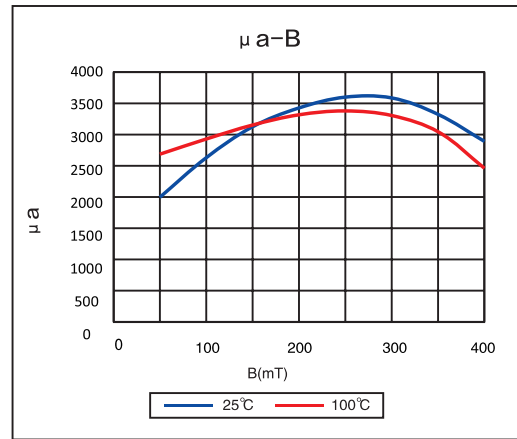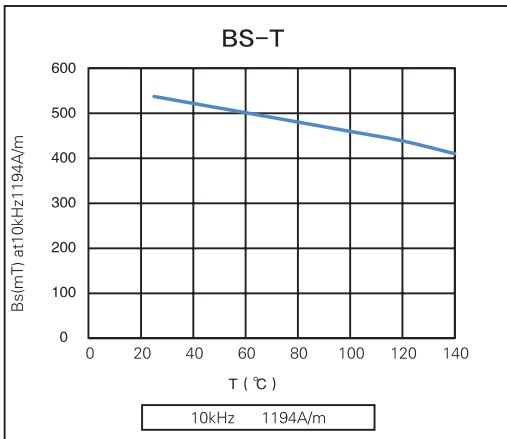



DTT-D9B

| 特性 Characteristics | 单位 Unit | 测试条件 Test conditions | DTT-D9B | |
|--|-------------------|-------------------------|-----------|------|
| 初始磁导率 μ_i Initial permeability | - | 10kHz 0.25mT 25°C | 800 ± 25% | |
| 振幅磁导率 μ_a * Amplitude permeability | - | 25kHz 400mT | 25°C | 2900 |
| | | | 100°C | 2500 |
| 饱和磁通密度 B_s * Saturation flux density | mT | H=1194A/m | 25°C | 610 |
| | | | 60°C | 565 |
| | | | 80°C | 540 |
| | | | 100°C | 520 |
| | | | 120°C | 490 |
| | | | 140°C | 467 |
| 功耗 P_{cv} * Power loss | kw/m ³ | 25kHz 250mT | 25°C | 550 |
| | | | 60°C | 440 |
| | | | 80°C | 370 |
| | | | 100°C | 325 |
| | | | 140°C | 330 |
| 居里温度 T_c Curie temperature | °C | | ≥ 300 | |
| 电阻率 ρ * | $\Omega \cdot m$ | | 8 | |
| 密度 D * | g/cm ³ | | 5 | |

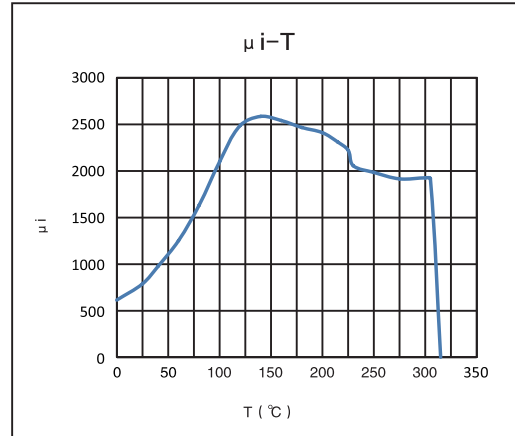

*: 典型值 Average value

